

54 Series TOPCon Dual Glass Bifacial Module

485-505W

NEX Series: SNX-D54HND(R4)

22.7%


Maximum Efficiency

0~+5w

Positive Power Tolerance

30 years

Product Warranty

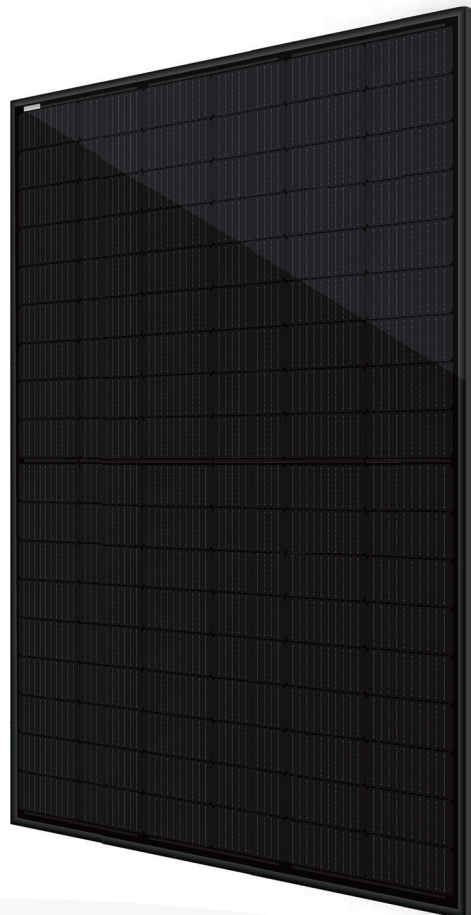

HIGHER VALUE

- Longer Warranty terms and lower power degradation
- Lower LCOE for shorter payback period

HIGHER PERFORMANCE

- Module Power reaches up to 505W by multi-busbar cell design
- Lower resistance performance by half-cell structure
- ZERO LID with additional power generation

MORE RELIABLE

- Excellent anti-PID performance
- Lower hot spot risks
- Better temperature coefficient
- Mechanical loading 5400Pa snow load and 2400Pa wind load




IEC61215(2021), IEC61730(2023)

IEC62716, IEC61701

ISO9001:2015: Quality management systems

ISO14001:2015: Environmental management

Fire CLASS 1: UNI 9177

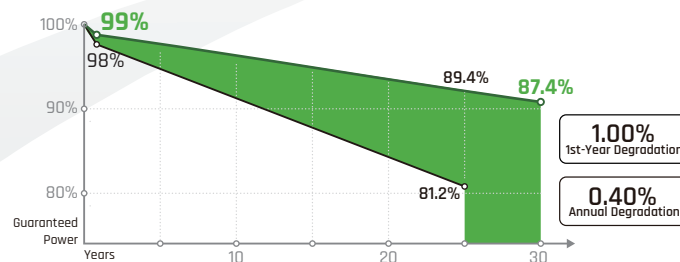

Sonnex TOPCon Dual Glass Module Performance Warranty

Warranty

30 years product workmanship warranty. 30 years linear power output warranty. The power degradation for the first year will be less than 1%. From the 2nd year and onwards, the annual degradation will be less than 0.40%. Guaranteed performance ratio of 87.4% after 30 years.



Sonnex Energie GmbH

Add: Gebäude 571, Cargo City Süd, 60549 Frankfurt am Main, Germany
www.sonnexenergie.com info@sonnexenergie.de

485-505W TOPCon Dual Glass MODULE

SNX-D54HND(R4)

Electrical Characteristics - STC

Module Type: SNX-D54HND***M(R4)	485	490	495	500	505
Maximum Power-Pm [W]	485	490	495	500	505
Open Circuit Voltage-Voc [V]	39.20	39.50	39.80	40.10	40.40
Short Circuit Current-Isc [A]	15.77	15.80	15.83	15.86	15.89
Maximum Power Voltage-Vm [V]	32.68	32.88	33.10	33.30	33.50
Maximum Power Current-Im [A]	14.85	14.91	14.97	15.03	15.08
Module Efficiency [%]	21.8	22.0	22.3	22.5	22.7

Electrical Characteristics - NMOT


Maximum Power-Pm [W]	371	375	378	382	386
Open Circuit Voltage-Voc [V]	37.10	37.40	37.70	38.00	38.30
Short Circuit Current-Isc [A]	12.72	12.74	12.76	12.78	12.80
Maximum Power Voltage-Vm [V]	30.86	31.08	31.30	31.52	31.73
Maximum Power Current-Im [A]	12.02	12.05	12.08	12.11	12.15

Note: 1. Standard Test Conditions (STC): Irradiance 1000 W/m²; AM 1.5; Ambient temperature 25°C.
 2. Nominal Module Operating Temperature (NMOT): Irradiance 800W/m²; wind speed 1m/s; ambient temperature 20°C.
 3. Tolerance of Pm: 0~+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

Mechanical Characteristics

Dimensions	1961×1134×30mm
Weight	26.9kg
Front Glass	AR coated tempered glass 2.0mm
Back Glass	Tempered glass 2.0mm
Frame	Anodized aluminum alloy
Cells	TOPCon 182x210mm, 108 (6×18)
Junction Box	IP68(3 bypass diodes)
Cable/Connectors	4mm ² / Stäubli MC4 or EV02

Drawing

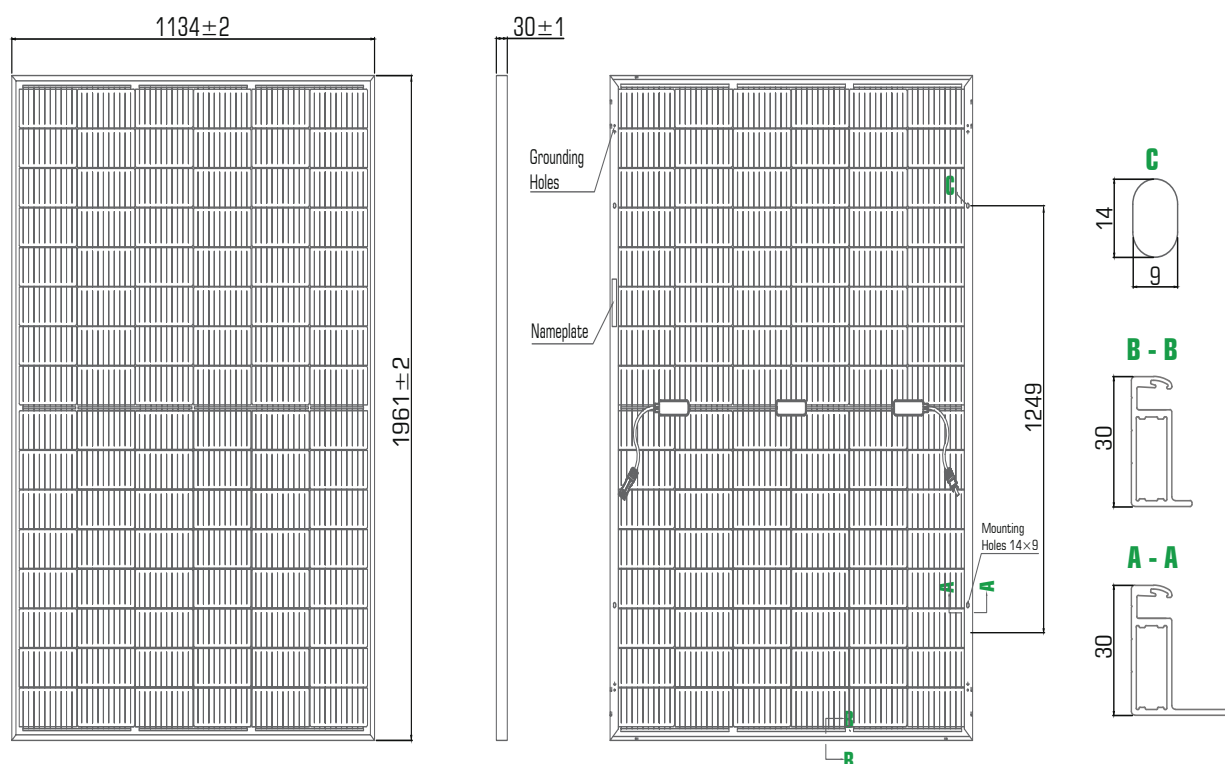

Temperature Characteristics

NMOT	42 °C (±2°C)
Temperature Coefficient of Voc	-0.25% /°C
Temperature Coefficient of Isc	+0.045% /°C
Temperature Coefficient of Pm	-0.29% /°C

Maximum Ratings


Maximum System Voltage [V]	DC 1500(IEC)
Series Fuse Rating [A]	30
Maximum Surface Load Capacity [Pa]	5,400
Temperature Range [°C]	- 45 to + 85
Bifaciality	80% ± 5%

Withstanding Hail Maximum diameter of 25 mm with impact speed of 23 m/s

Other Characteristics

Packaging 36pcs/pallet; 792pcs/40' HQ container

I-V curve

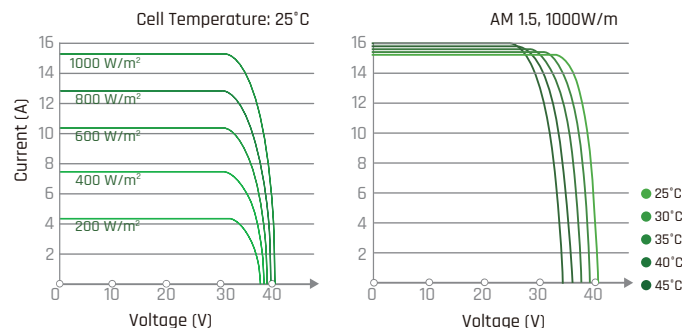

Declaration: Along with the technical improvement and product update, deviation between the technical parameter and Sonnex future products might occur. Specifications included in this datasheet are subject to change without prior notice. Sonnex reserves the right of final interpretation.